

MSR213E


Encryption Magnetic Stripe Reader



The MSR213E is one of the MSR213 Series of Magnetic Stripe Readers with additional security features of Triple Data Encryption Standard (TDES) encryption and Derived Unique Key Per Transaction (DUKPT) key management. It is powered from the USB port eliminating the need for external power. The MSR213E operates in Keyboard Emulation, Virtual COM Interface and UIC defined Human interface Device (HID) modes.

Features and Benefits

- Card data is encrypted with Triple DES algorithm using DUKPT key management.
- Track data output is masked according to a Mod 10 Correction setting.
- Reads Magnetic Stripe cards conforming to ISO7810 and 7811
- Triple track and support for 75/210bpi recording density
- Read both low and high coercivity cards (300-4000 Oe)
- Bi-directional card swipe
- Supports multiple interfaces (USB HID-MSR, USB HID-KB, USB Virtual-COM)
- Two-frequency coherent phase (F2F) decoding
- Reader status LED and buzzer

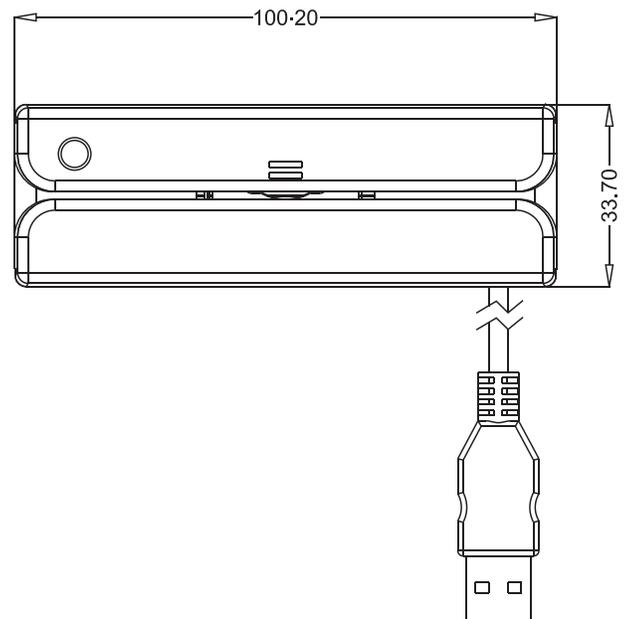

Banking



Kiosk



Hospitality

MSR213E

Encryption Magnetic Stripe Reader

The MSR213E reads all three tracks of the magnetic stripe cards in both directions and fully conforms to ISO 7811, American Association of Motor Vehicle Administrators (AAMVA) and Department of Motor Vehicles (DMV) standards. It has a status LED that is off, green or red based on the status of the reader. There is also a buzzer to further indicate the status of the reader. It is a highly intelligent device that uses flash memory to store keys and has the capability to turn the LED red when all DUKPT keys have been used.

Specifications

MECHANICAL

Body Material:	ABS 94V-0
Dimensions:	100 mm L x 34 mm W x 28 mm H
Weight:	Approx. 4.2 ounces (120 g)
Connector:	USB Type A Plug
Card Handling Method:	Manual swipe, bi-directional

ENVIRONMENTAL

Operating Temperature:	14°F to 122°F (-10°C to +50°C)
Storage Temperature:	-22°F to 158°F (-30°C to +70°C)
Operating Humidity:	10% to 90%
Storage Humidity:	10% to 90%

AGENCY APPROVAL

FCC Class B, CE Class B, BSMI Class B.
Meet PCI DSS requirement
Meet UPOS requirement (current version 1.12)

ELECTRICAL

F2F MRD 532 decoder	
Processor:	Micro-controller capable of TDES processing
Magnetic Card Reader:	ISO7811; Triple tracks reading
Power Requirement:	+5VDC +-10% from USB Port
Power Consumption:	35mA Max. in normal condition.
Interface:	USB HID KB emulation / USB HID

PERFORMANCE

Read Card Format	Track 1: Bit Density 210 bpi Track 2: Bit Density 75 bpi Track 3: Bit Density 210 bpi
Card Types:	Magnetic cards as per ISO7810, 7811, AAMVA
Read Capability:	Magnetic stripe - dual or triple track of low/high coercivity (300~4000 Oe)
Test Card Types	Standard card: Read Speed 5~55 ips Jitter±15%: Read Speed 5~50 ips Amp.60%: Read Speed 5~50 ips
Card Thickness:	Card Thickness: 0.76 ±0.08mm
Error rate:	Error rate: <0.5%
Magnetic Head Life:	Magnetic Head Life: 1 M Swipes



UIC USA

47341 Bayside Parkway, Fremont,
 CA94538, USA
 Tel: 510-438-6799 Fax: 510-438-6790
 info@uicusa.com

UIC Taiwan

1F, No.1, Ln 15, Ziqiang St., Tucheng Dist.,
 New Taipei City 236, Taiwan.
 Tel: 886-2-2268-7075 Fax: 886-2-2269-5686
 salessupport@uniform.com.tw

UIC Europe GmbH

Daimlerstraße 6, 61449 Steinbach
 am Taunus, Germany
 Tel: +49 6171 2088 Fax: +49 6171 2088 413
 info@uiceurope.com